



DISHWASHER SRC-2200IS6EV 400/50/3N

85/126 baskets per hour (up to 2.200 plates/hour).

P/N 1302523



WARE WASHING
RACK CONVEYOR DISHWASHERS



- ✓ Temperature control with high precision probes.
- ✓ Visualisation and adjustment of washing and rinsing temperatures in the digital display by pressing a button.
- ✓ Easy to install rinse aid dispenser intake in boiler.

INCLUDES

- ✓ Inlet and outlet splash guards are standard.
- ✓ Drying unit TS-600.
- ✓ Extraction hood with motor EV.

OPTIONAL

- Inlet systems.
- Outlet systems.

ACCESSORIES

- Manual water softeners
- Automatic water softeners
- 500 x 500 mm. baskets
- Inserts & supplements
- Loading table for corner situation for rack conveyor dishwashers
- Central sorting tables
- Double connection central sorting table
- Single exit tables
- Roller conveyor and corner roller conveyor
- Machined curve
- Connecting tables for pass-through dishwashers and rack conveyors

SALES DESCRIPTION

Washing + rinsing.
2 speeds.

- ✓ Fully stainless steel jacket.
- ✓ Inlet and outlet splash guards are standard.
- ✓ Stainless steel central rack feed system.
- ✓ Process cycles are divided by rubber curtains.
- ✓ Automatic cycle start.

Economy

- ✓ Energy saving rinse supply switch.
- ✓ Pressure controller in the rinse section to limit consumption.
- ✓ Programmed automatic stops if there is no loading.
- ✓ Stop and freezing of timer when the limit switch actuates.

Cleaning and maintenance

- ✓ Wide pivoting door allowing access for cleaning or inspection purpose.
- ✓ Detachable arms and dispersers for easier cleaning.
- ✓ Sloped removable stainless steel filters with independent removable basket.
- ✓ Easy boiler emptying by loosening a hose.
- ✓ Failures are easily detected thanks to the warning lights.
- ✓ Easy to repair without moving the machine.

Washing

- ✓ Stainless steel wash arms and deep-drawn dispersers.
- ✓ Efficient and durable wash arm dispersers.
- ✓ Powerful, self-draining vertical wash pump.
- ✓ Easy to install detergent dispenser intake in washing tank. Rinsing

Rinsing

- ✓ Stainless steel rinse arms and powerful, stainless steel, deep-drawn dispersers.
- ✓ Automatic boiler filling with no failure risk for heating elements.

SPECIFICATIONS

Production

- ✓ Production baskets/hour: 85 / 126
- ✓ Production plates/hour: 1530 / 2200

Wash

- ✓ Temperature: 55 °C - 65 °C
- ✓ Wash tank capacity: 100 l
- ✓ Pump: 3 Hp / 2250 W
- ✓ Wash heating element: 9000 W

Rinse

- ✓ Temperature: 80 °C - 90 °C
- ✓ Water consumption: 300 l/h
- ✓ Rinse heating element: 18000 W
- ✓ Boiler capacity: 20 l

Drag

- ✓ Drag motor power: 0.25 Hp / 180 W

Drying

- ✓ Air flow: 1300 m³/h
- ✓ Fan power: 1 Hp / 750 W
- ✓ Dryer heater element: 6000 W

Mist extractor

- ✓ Ev output diameter: 176 mm
- ✓ Mist extractor power: 0,75 Hp / 550 W

Loading

- ✓ Total installed power: 36820 W

Electrical supply: 400 V / 50 Hz /3N ~ (55 A)
Electrical connection: 3P+N+G

External dimensions (WxDxH)

- ✓ Width: 2100 mm
- ✓ Depth: 829 mm





DISHWASHER SRC-2200IS6EV 400/50/3N

85/126 baskets per hour (up to 2.200 plates/hour).




P/N 1302523

- ✓ Height: 1520 mm
- Net weight:** 370 Kg
- Water Intake:** 3/4 "
- Drain diameter:** 1 1/2 "
- Noise level (1m.):** 71 dB(A)

Crated dimensions
 980 x 2450 x 1900 mm
 Gross weight: 405 Kg

WARE WASHING
 RACK CONVEYOR DISHWASHERS

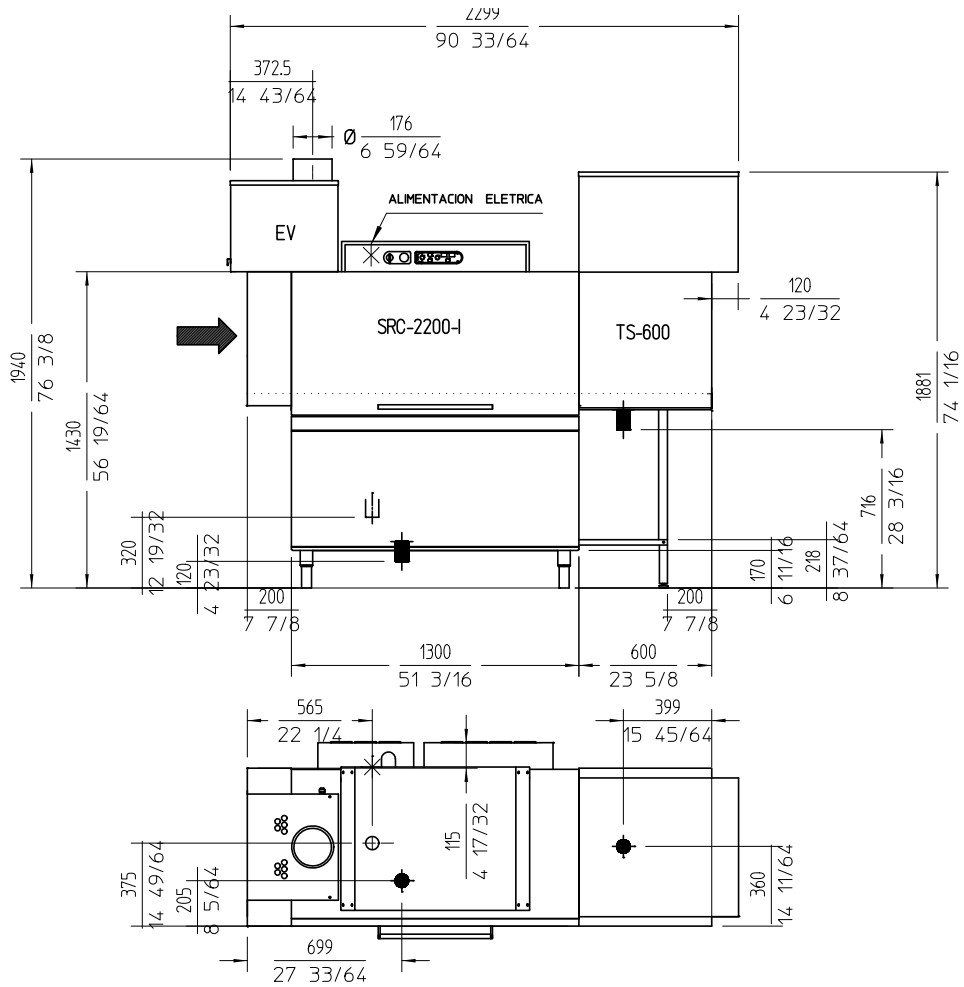

sammic | www.sammic.com
 Food Service Equipment Manufacturer

Polígono Basarte, 1. phone +34 943 15 72 36
 20720 Azkoitia, Spain sales@sammic.com



Project	Date
Item	Qty
Approved	

product sheet
 updated 20/07/2023