



# DISHWASHER UX-50SB 400/50/3N DD

Rack size 500x500mm and door clearance 380 mm. Double-skinned construction.

P/N 1303266



WARE WASHING  
COMMERCIAL DISHWASHERS

removed without having to disconnect the washing arms.

### “Easy grip” door: new design with integrated door handle

- ✓ The integration of the components provides greater resistance and robustness.
- ✓ Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal
- ✓ 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39.

### Premium warewashing

- ✓ Ultra Xperience: high performance, without complications.
- ✓ Soft start: progressive start-up of the washing pump to protect fragile items.
- ✓ Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- ✓ TEMPERATURE DISPLAY
- ✓ Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- ✓ Control panel with IP65 humidity protection.

### You will never WASH ALONE

- ✓ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

### INCLUDES

- ✓ Detergent Dispenser.
- ✓ Rinse aid pump.
- ✓ Drainage pump with level sensor. Proactive tank water renewal.
- ✓ 1 glasses basket.
- ✓ 1 mixed basket (plates).
- ✓ 1 small basket for cutlery.

### OPTIONAL

- Double-level accessory for washing two baskets at the same time.

### ACCESSORIES

- Manual water softeners
- Automatic water softeners
- 500 x 500 mm. baskets
- Inserts & supplements
- High feet kit
- Reverse osmosis device OS-140P
- Stands for dishwashers 500x500mm

### SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm  
Maximum glass height: 380 mm

Cycle duration: 90/110/120/180/240 “  
Production baskets/hour: 40/33/30/20/15

Wash temperature: 55 °C - 65 °C  
Rinse temperature: 65 °C - 87 °C

Boiler capacity: 8 l  
Wash tank capacity: 14 l

### Consumption and savings

## SALES DESCRIPTION

Sani-Control: guaranteed disinfection  
 Embedded bodywork and easy-grip door: hygienic and ergonomic  
 Double-walled body: insulation and energy efficiency  
 Exclusive Hydroblade™ washing arms: maximum effectiveness.  
 3-stage filtering system.

### Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

### New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- ✓ Compact tank volume (50% water saving compared to the previous range).
- ✓ Embedded basket guides

### Double-Walled (Ultra ISO)

- ✓ Double-Walled Structure: thermo-acoustic insulation to attenuate the sound level and improve energy efficiency

### Hydroblade™ washing arms

- ✓ Redesigned nozzles for greater washing performance.
- ✓ The “monoblock” design delivers durability and resistance to impacts.
- ✓ 30% savings in water consumption during rinsing compared to the previous range.

### 3-stage filter system: surface, tank and extraction

- ✓ Keeps the washing water in optimal conditions to maintain constant washing performance.
- ✓ The surface filters feature an “easy-on” design and can be quickly





# DISHWASHER UX-50SB 400/50/3N DD

Rack size 500x500mm and door clearance 380 mm. Double-skinned construction.



P/N 1303266

Water consumption/cycle: 2,5 l  
Automatic saving mode in: y '  
Automatic switch-off: -- '

### Loading

Pump: 1 W / 750 Hp  
Tank: 1800 W  
Boiler: -- W  
Total loading: 5750 / 4550 / 2750 W (multipower)

**Electrical supply:** 400 V / 50 Hz / 3N ~ (8.5 A)  
Electrical connection: --

### Electrical supply - multi-phase options

✓ -- (Default)

✓ --

✓ --

### External dimensions (WxDxH)

✓ Width: 600 mm

✓ Depth: 635 mm

✓ Height: 835 mm


Net weight: 64 Kg

Noise level (1m.): -- dB(A)

### Crated dimensions

640 x 695 x 960 mm

Gross weight: 71 Kg

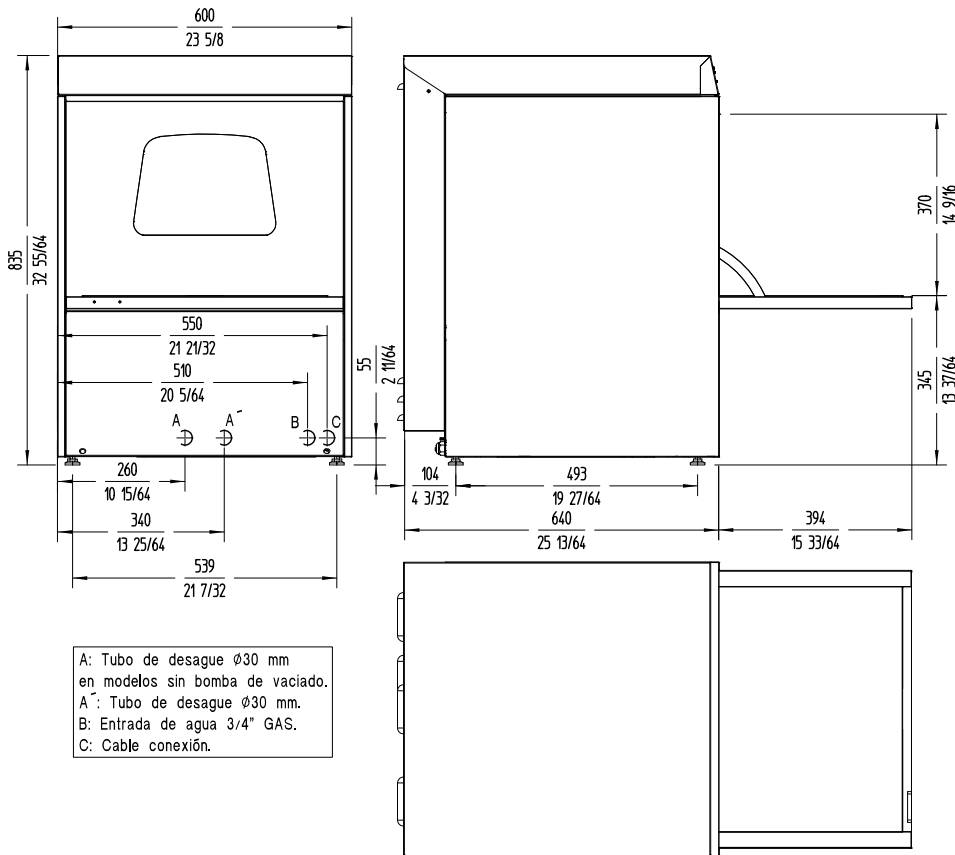

A: Tubo de desague  $\phi$ 30 mm en modelos sin bomba de vaciado.  
 A': Tubo de desague  $\phi$ 30 mm.  
 B: Entrada de agua 3/4" GAS.  
 C: Cable conexión.

WARE WASHING  
COMMERCIAL DISHWASHERS

**sammic** | www.sammic.com  
Food Service Equipment Manufacturer

Polígono Basarte, 1. phone +34 943 15 72 36  
20720 Azkoitia, Spain sales@sammic.com



Project	Date
Item	Qty
Approved	

product sheet  
updated 09/11/2022