



VACUUM PACKING MACHINE SU-316GP+ 230/50-60/1

Tabletop model. 16 m³/h. 320 mm.



P/N 1140749



SALES DESCRIPTION

320 mm. sealing bar.
16 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 25-programme memory. Blocking option.
- ✓ "Pause" button.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with Automatic decompression.
- ✓ Stainless steel body and chamber. Deep-drawn chamber.
- ✓ Damped transparent lid of high durability polycarbonate.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed model.

INCLUDES

- ✓ Filling plate
- ✓ Wireless connectivity
- ✓ Inert gas flush (2 injectors).
- ✓ Printer connection

OPTIONAL

- ☐ Printer
- ☐ Vacuum packing pouches
- ☐ Vac-Norm external vacuum kit, containers and accessories
- ☐ Bag cutting kit
- ☐ Support for liquids
- ☐ Additional filling plates

ACCESSORIES

- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kits
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum packing
- ☐ Trolley for vacuum packing
- ☐ machines
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer

SPECIFICATIONS

Pump capacity: 16 m³/h
Pump capacity (60 Hz): 19 m³/h
Bar length: 320 mm
Total loading: 550 W
Vacuum pressure (maximum): 2 mbar
Electrical supply: 230 V / 50-60 Hz / 1~ (4.1 A)
Plug: EU (SCHUKO 2P+G)

Internal dimensions

- ✓ Width: 330 mm
- ✓ Depth: 360 mm
- ✓ Height: 155 mm

External dimensions (W x D x H)

- ✓ Width: 384 mm
- ✓ Depth: 465 mm
- ✓ Height: 403 mm

Net weight: 42.3 kg

Noise level (1m.): 75 dB(A)
Background noise: 32 dB(A)

Crated dimensions

460 x 530 x 460 mm
Gross weight: 49.3 kg

FOOD PRESERVATION AND SOUS-VIDE
VACUUM PACKING MACHINES • SENSOR ULTRA LINE



product sheet
updated 15/03/2024






VACUUM PACKING MACHINE SU-316GP+ 230/50-60/1

Tabletop model. 16 m³/h. 320 mm.



P/N 1140749

FOOD PRESERVATION AND SOUS-VIDE
VACUUM PACKING MACHINES • SENSOR ULTRA LINE

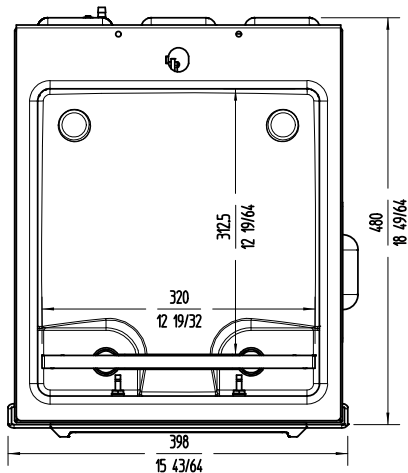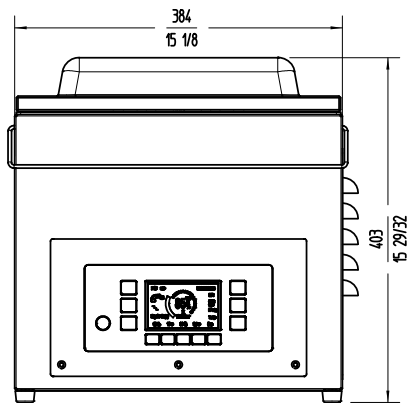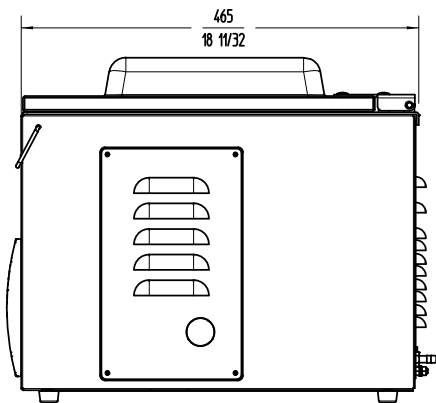

sammic | www.sammic.com
Food Service Equipment Manufacturer
Polígono Basarte, 1.
20720 Azkoitia, Spain
phone +34 943 15 72 36
sales@sammic.com



Project	Date
Item	Qty
Approved	

product sheet
updated 15/03/2024