



VACUUM PACKING MACHINE SU-604GP 230-400/50/3N

Floorstanding unit. 40 m³/h. 413 + 656 mm.



P/N 1140815



SALES DESCRIPTION

Two sealing bars 413 + 656 mm.
40 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum plus.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 25-programme memory. Blocking option.
- ✓ "Pause" button.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with automatic decompression.
- ✓ Stainless steel body and chamber.
- ✓ Damped transparent lid.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed.

INCLUDES

- ✓ Filling plate
- ✓ Inert gas flush (4+2 injectors).
- ✓ Wireless connectivity
- ✓ Printer connection

OPTIONAL

- ☐ Printer
- ☐ Vacuum packing pouches
- ☐ Vac-Norm external vacuum kit, containers and accessories
- ☐ Bag cutting kit
- ☐ Support for liquids
- ☐ Additional filling plates

ACCESSORIES

- ☐ Bag cutting kits
- ☐ Filling plates
- ☐ Liquid insert plates
- ☐ Vac-norm external vacuum kits
- ☐ Vac-norm containers
- ☐ Smooth bags for vacuum packing
- ☐ Thermal labels for CG2 / RB printer
- ☐ RB desktop printer for SU vacuum packing machines
- ☐ Thermal transfer labels for RB printer

SPECIFICATIONS

Pump capacity: 40 m³/h
Pump capacity (60 Hz): 48 m³/h
Bar length: 413 mm + 656 mm
Total loading: 1100 W
Vacuum pressure (maximum): 0.5 mbar
Electrical supply: 400 V-230 V / 50 Hz / 3N~ (5.9 A)
Electrical connection: 3P+N+G

Internal dimensions

- ✓ Width: 672 mm
- ✓ Depth: 481 mm
- ✓ Height: 200 mm

External dimensions (W x D x H)

- ✓ Width: 740 mm
- ✓ Depth: 566 mm
- ✓ Height: 997 mm

Net weight: 146 kg

Noise level (1m.): 75 dB(A)
Background noise: 32 dB(A)

Crated dimensions

670 x 830 x 1200 mm
Gross weight: 183.8 kg

FOOD PRESERVATION AND SOUS-VIDE
VACUUM PACKING MACHINES • SENSOR ULTRA LINE



product sheet
updated 24/05/2024




VACUUM PACKING MACHINE SU-604GP 230-400/50/3N

Floorstanding unit. 40 m³/h. 413 + 656 mm.



P/N 1140815

FOOD PRESERVATION AND SOUS-VIDE
VACUUM PACKING MACHINES • SENSOR ULTRA LINE

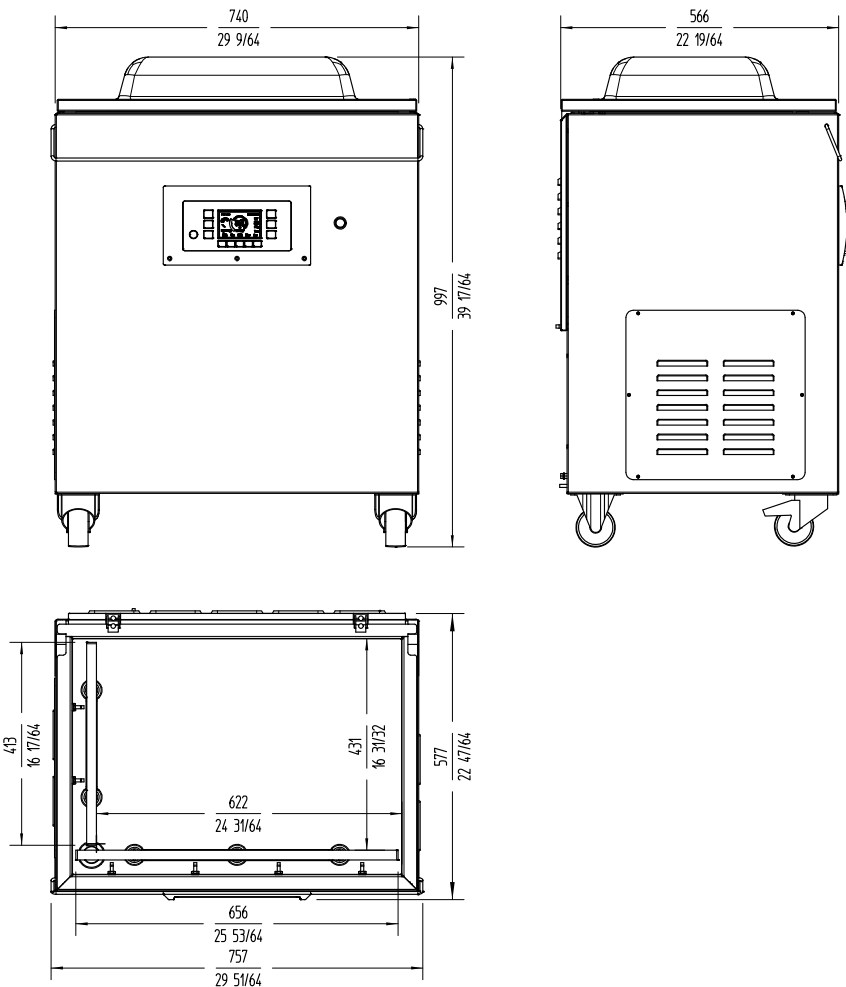

sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1.
20720 Azkoitia, Spain

phone +34 943 15 72 36
sales@sammic.com



Project	Date
Item	Qty
Approved	

product sheet
updated 24/05/2024